

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number  
**WO 2005/027703 A1**

(51) International Patent Classification<sup>7</sup>: **A47K 13/24**

(21) International Application Number:  
PCT/AU2004/001301

(22) International Filing Date:  
23 September 2004 (23.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003905239 24 September 2003 (24.09.2003) AU

(71) Applicant (for all designated States except US): **MAG SOLUTIONS PTY LTD** [AU/AU]; 40 Darnley Street, Gordon, NSW 2072 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCDONALD,**


Andrew [AU/AU]; 40 Darnley Street, Gordon, NSW 2072 (AU). **GREVETT, Douglas** [AU/AU]; 40 Darnley Street, Gordon, NSW 2072 (AU). **BROWN, Warwick** [AU/AU]; 114 Capel Street, North Melbourne, VIC 3051 (AU). **MARTINUZZO, Stephen** [AU/AU]; 114 Capel Street, North Melbourne, VIC 3051 (AU). **SMITH, Shannon** [AU/AU]; 114 Capel Street, North Melbourne, VIC 3051 (AU).

(74) Agent: **F B RICE & CO**; 605 Darling Street, Balmain, NSW 2041 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: MEANS FOR DISENABLING THE USE OF A TOILET BOWL

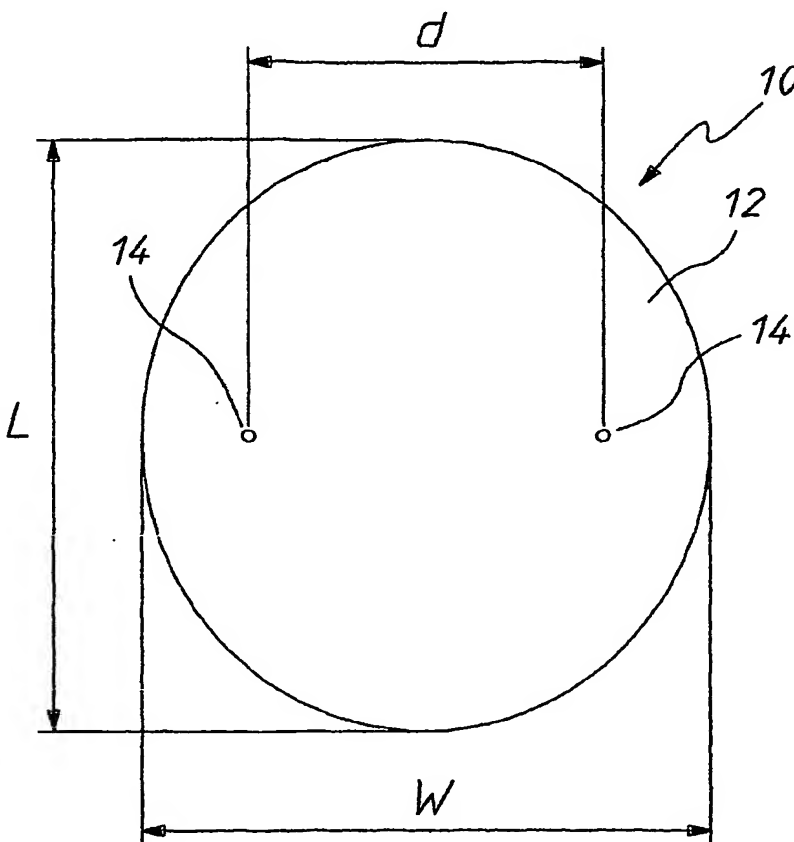

(57) Abstract: A toilet blocker for temporarily blocking a toilet bowl comprises a cover means (10; 100; 200; 300) for temporarily covering a toilet bowl (50), and a locking arrangement connected to or connectable to the cover means for securing the cover means in position covering the bowl of the toilet. The locking arrangement is arranged to engage with or under the lower edge of the splashback preventer of the rim (54) of the toilet bowl (50). Various embodiments of toilet blocker are disclosed in some of which a bracket (18; 116; 218) rotates into position under the rim 54 of the toilet. In another embodiment the bracket (314) is V-shaped and slides and is pulled upwards to lock to the rim (54) of the toilet.

WO 2005/027703 A1



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*